


BRV201 – BRV202 TEXTILE MURAL

700"W × 206.75"H • STM – BERRI-UQÀM – LINE 1



	ARTWORK SIZE SCALE 1 : 10	PRINT SIZE
Bleed	70.15"W × 20.825"H	701.5"W × 208.25"H
Document/Trim size	70"W × 20.675"H	700"W × 206.75"H
Visible area	70"W × 20.675"H	700"W × 206.75"H
Safety area	68.8"W × 19.475"H	688"W × 194.75"H
File resolution	800 dpi	80 dpi
Colour	CMYK	CMYK
Material	Textile	
Finishing	Assembly by central sewing. Silicone beading on all sides	
Finished size	Real-size final format after printing and finishing: 700"W × 206.75"H	
Other information	N/A	

ARTWORK PREPARATION

- Accepted artwork formats: **Adobe PDF (press optimized), InDesign, Illustrator, Photoshop**
- Embed all images and vectorize all text. If not, please provide linked images and fonts used
- Gradients must be greater than 5%. Deep black: 60%C, 60%M, 60%Y, 100%K

SENDING FOR PRINTING

- Send all files in a single compressed folder (Zip), through a data transfer service. A low resolution PDF version of each creative must also be sent by e-mail to the producer in charge
- Color references (hardcopy or PMS) can be provided to us for matching on press
- Reception no later than **20 business days** before posting, with contract number identified on everything



IMPORTANT NOTES

- Artwork might be subject to third-party approval – transit company, airport authority, landlord, etc.
- **Charter of the French Language requires that advertising in Quebec be only in French.**
- Printing and installation of this product are exclusive to Astral.
- Please use provided PDF artwork template.

BRV201 – BRV202 MURALE TEXTILE

FR |

700"L × 206.75"H • STM – BERRI-UQÀM – LIGNE 1

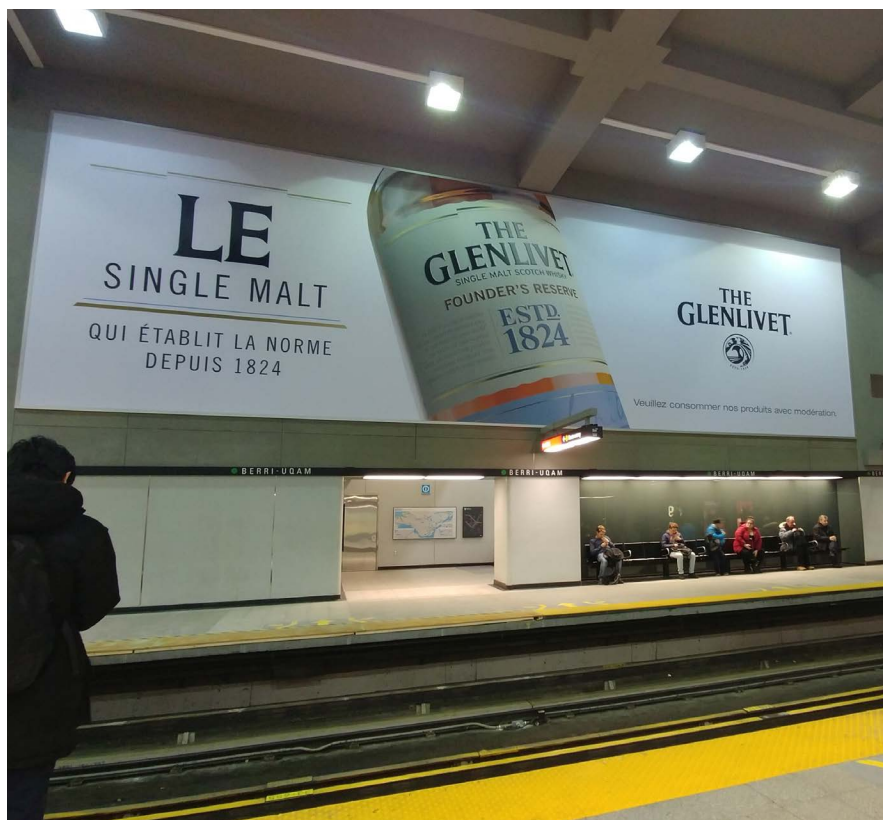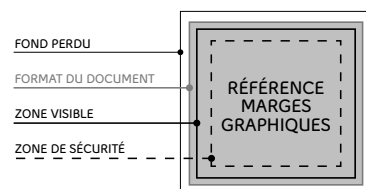

	FORMAT FICHIER ÉCHELLE 1 : 10	FORMAT IMPRIMÉ
Fond perdu	70.15"L × 20.825"H	701.5"L × 208.25"H
Format du document	70"L × 20.675"H	700"L × 206.75"H
Zone visible	70"L × 20.675"H	700"L × 206.75"H
Zone de sécurité	68.8"L × 19.475"H	688"L × 194.75"H
Résolution de fichier	800 ppp (dpi)	80 ppp (dpi)
Colorimétrie	CJMN (CMYK)	CJMN (CMYK)
Matériel	Textile	
Finition	Assemblage par couture centrale. Bande de silicone sur le pourtour	
Format fini	Format final réel après impression et finition : 700"L × 206.75"H	
Autres informations	Nd	

PRÉPARATION DE FICHIER

- Formats de montage acceptés : **Adobe PDF (optimisé pour presse), InDesign, Illustrator, Photoshop.**
- Veuillez intégrer les images et vectoriser le texte, ou fournir les images liées et les fontes utilisées.
- Dégradés de plus de 5% seulement. Noir enrichi : 60%C, 60%M, 60%J, 100%N.

ENVOI POUR IMPRESSION

- Envoyez tous les fichiers dans un seul dossier compressé (Zip) avec un outil de transfert de données, en plus d'un pdf basse résolution de chaque visuel par courrier électronique au Producteur responsable.
- Des références couleurs papier ou PMS peuvent nous être fournies pour correspondance à l'impression.
- Réception au plus tard **20 jours ouvrables** avant la date d'affichage, avec numéro de contrat visible.

NOTES IMPORTANTES

- Le créatif peut être sujet à l'approbation d'un tiers parti – société de transport, aéroport, propriétaire, etc.
- La Charte de la langue française exige que la publicité au Québec soit uniquement en français.
- L'impression et l'installation de ce produit sont exclusives à Astral.
- Veuillez utiliser le gabarit PDF de montage fourni.